



## STRATOS 2.0

DOMUS Line  
design

**LED profile for bathroom lighting  
with wide projection**

**Materials:**

aluminium

**Finishes:**

aluminium

**Light source:**

SMD LED module

**Application type:**

on the vertical or horizontal perimeter of  
the bathroom mirror

**Installation:**

surface

### Features

STRATOS is an aluminium profile equipped with high luminous efficiency diffuser. Ideal for installation on any surface (wood, plasterboard or brick wall). It incorporates the converter and connects to the main power directly.  
Also comes in the *white changeable version*.



#### No point effect technology


The light projection of the luminaire is homogeneous, diffused and devoid of the dotted effect typical of traditional LED luminaires.



#### IP44 Splash protection

STRATOS is a device with IP44 degree protection.

Device with non-replaceable LED module  
Energy efficiency class: A++, A+, A  
EU Regulation No. 874/2012

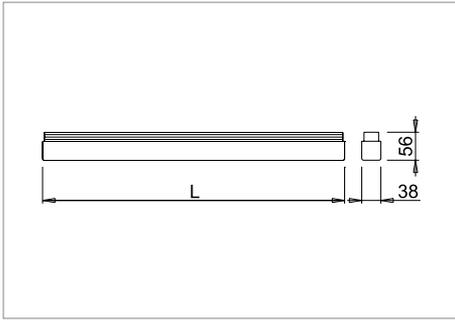



**STRATOS 2.0**

for surface installation



Code	Length	Watt & Volt	Light colour	Finish
1034105B	415mm	5,5W @ 230Vac	warm white	aluminium
1034205B	590mm	12W @ 230Vac	warm white	aluminium
1034305B	890mm	16W @ 230Vac	warm white	aluminium
1202405B	1190mm	22W @ 230Vac	warm white	aluminium

**BUILT-IN LED CONVERTER**



**Colour appearance** warm white  
**Colour temperature** 3000 Kelvin  
**Luminous efficiency** 100 lm/W  
**CRI** Ra ≥ 80

\* values referred to STRATOS 2.0 1190mm



**White changeable technology**

Device with TWIN LED strips, power supply and sequencer integrated. The sequencer allows to configure three white temperatures (cold, natural and warm), with an impulse from an on/off switch it is connected to. The selection is memorised after ten seconds and can be modified by switch within 2 seconds of ignition.


**STRATOS WHC \_ white changeable technology**

for surface installation




Code	Length	Watt & Volt	Light colour	Finish
1223810	415mm	5,5W @ 230Vac	white changeable	aluminium
1223910	590mm	12W @ 230Vac	white changeable	aluminium
1224010	890mm	16W @ 230Vac	white changeable	aluminium
1224110	1190mm	22W @ 230Vac	white changeable	aluminium

**BUILT-IN LED CONVERTER**



**Colour appearance** white changeable  
**Colour temperature** 3000-4000-6000 Kelvin  
**Luminous efficiency** 100 lm/W  
**CRI** Ra ≥ 80

\* values referred to STRATOS WHC 1190mm

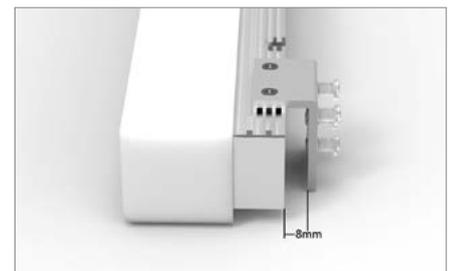

STRATOS BK available on request; this version is equipped with brackets to be mounted on min. 5mm and max. 8 mm thick mirrors directly.