DOMUS LINE

WING

Domus Line
design

Shelf with integrated lighting

Materials:
aluminium, glass, polycarbonate
Finishes:
aluminium, steel, black touch
Light source:
HE LED module (120 LED/m)
**Wiring:**
1600mm
Application type:
universal
Installation:
on the wall

WING is a shelf with integrated lighting with an extra clear glass thick only 8mm. Supplied in the standard configuration with two LED strips, one for diffused lighting of the glass shelf and one for the lower asymmetrical lighting. **WING** integrates a dimmer touch switch that turns on, off and adjusts the luminous intensity of the luminaire.

Colour appearance	natural white	
Colour temperature	4200 K	
Luminous efficiency	85 lm/W	
CRI	Ra ≥ 80	

Colour appearance	warm white	
Colour temperature	4200 K	
Luminous efficiency	85 lm/W	
CRI	Ra ≥ 80	

* values referring to WING HE 1200mm

WING HE TLD
with touch dimmer switch

Code	Length	Watt & Volt	Light colour
10245_ _N/HE	450mm	7,2W @ 230Vac	natural white
10246_ _N/HE	600mm	10,1W @ 230Vac	natural white
10247_ _N/HE	900mm	15,8W @ 230Vac	natural white
10248_ _N/HE	1200mm	21,6W @ 230Vac	natural white
10245_ _B/HE	450mm	7,2W @ 230Vac	warm white
10246_ _B/HE	600mm	10,1W @ 230Vac	warm white
10247_ _B/HE	900mm	15,8W @ 230Vac	warm white
10248_ _B/HE	1200mm	21,6W @ 230Vac	warm white

Code	Finish
05	aluminium
16A	steel
46	black touch
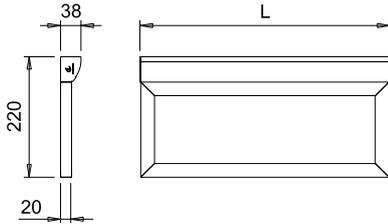
BUILT-IN LED CONVERTER.

230V
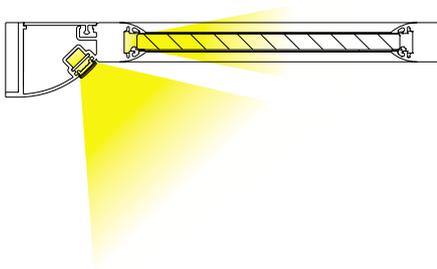
WING HE TLD is wall-mounted with the aid of a specific profile. Screws and dowels (supplied) are concealed. Dowels placed in the shelf support profile allow to adjust the inclination.

WING HE TLD integrates a dimmer touch electronic switch which, when touched, switches on and off and adjusts the luminous intensity of the luminaire.

For power supplies and accessories see page 46 or browse the Domus Extra catalogue.

[1] For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com

FINISHES

ALUMINIUM (code 05)

STEEL (code 16A)

BLACK TOUCH (code 46)