



## SPLITTY

Giuseppe Bavuso  
design

### Recessed LED profile with asymmetrical light projection

#### Materials:

aluminium, polycarbonate,  
thermoplastic polymers

#### Finish:

aluminium

#### Light source:

HE LED module (120 LED/m)

#### Wiring:

2000mm



#### Application type:

under cabinet, under shelf



#### Installation:

recessed

SPLITTY's asymmetrical projection and special configuration eliminate dazzle. It can be combined with a multifunction electronic touch dimmer switch. Ideal for use under cabinets and shelves.



**Colour appearance** natural white  
**Colour temperature** 4300 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** warm white  
**Colour temperature** 3100 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80


\* values referring to SPLITTY HE IFR 1130mm



**SPLITTY HE**  
without switch



Code	Length	Watt & Volt	Light colour	Finish
1032405N/1/HE	381mm	3,4W @ 24Vdc	natural white	aluminium
1032505N/1/HE	531mm	4,8W @ 24Vdc	natural white	aluminium
1032605N/1/HE	831mm	7,7W @ 24Vdc	natural white	aluminium
1032705N/1/HE	1131mm	10,6W @ 24Vdc	natural white	aluminium
1032405B/1/HE	381mm	3,4W @ 24Vdc	warm white	aluminium
1032505B/1/HE	531mm	4,8W @ 24Vdc	warm white	aluminium
1032605B/1/HE	831mm	7,7W @ 24Vdc	warm white	aluminium
1032705B/1/HE	1131mm	10,6W @ 24Vdc	warm white	aluminium

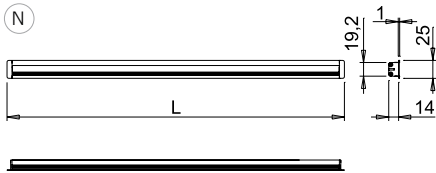

**CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.**




(N) This drawing shows the profile's overall dimensions. See installation manual for more details.



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 80.




FOR TUNABLE WHITE VERSIONS, SEE THE **DOMUS LINE TW CATALOGUE**.

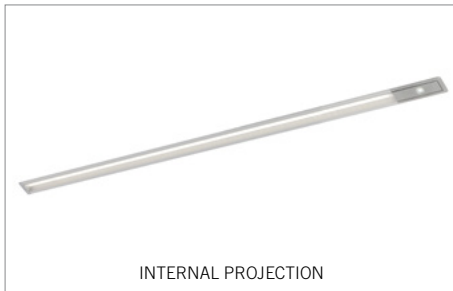

**SPLITTY HE TLD**  
with touch dimmer switch



Code	Length	Watt & Volt	Light colour	Finish
1032405N/HE	381mm	2,9W @ 24Vdc	natural white	aluminium
1032505N/HE	531mm	4,3W @ 24Vdc	natural white	aluminium
1032605N/HE	831mm	7,2W @ 24Vdc	natural white	aluminium
1032705N/HE	1131mm	10,1W @ 24Vdc	natural white	aluminium
1032405B/HE	381mm	2,9W @ 24Vdc	warm white	aluminium
1032505B/HE	531mm	4,3W @ 24Vdc	warm white	aluminium
1032605B/HE	831mm	7,2W @ 24Vdc	warm white	aluminium
1032705B/HE	1131mm	10,1W @ 24Vdc	warm white	aluminium

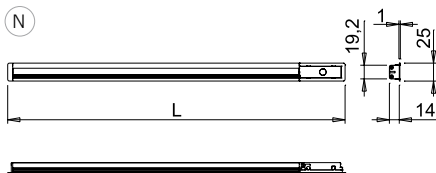

**CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.**



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.



PROFILE DETAIL

**SPLITTY** is designed for recessed installation on horizontal shelves with a milled groove 14mm deep and 19.2mm wide.



SWITCH ON RIGHT  
INTERNAL PROJECTION



**SPLITTY HE TLD** has an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".



STANDARD VERSION

The side heads can be fixed to a blind-milled groove. The 2,000mm power cord and Micro24 connector can exit the surface radially or axially.



SPLITTY HI FOR THROUGH MILLED GROOVE  
AVAILABLE UPON REQUEST

Available in custom configurations on request, and with side heads for use with through-milled grooves.